


Linux Installation

- Get the DBSync Linux zip file from the following URL


<http://mydbsync.com/integration/cloud-replication-for-salesforce>

- Once the zip file is downloaded to the desired location on your Linux server, navigate to the folder and use the command **unzip -d /install-dir dbsync-repl-30-tomcat.zip**

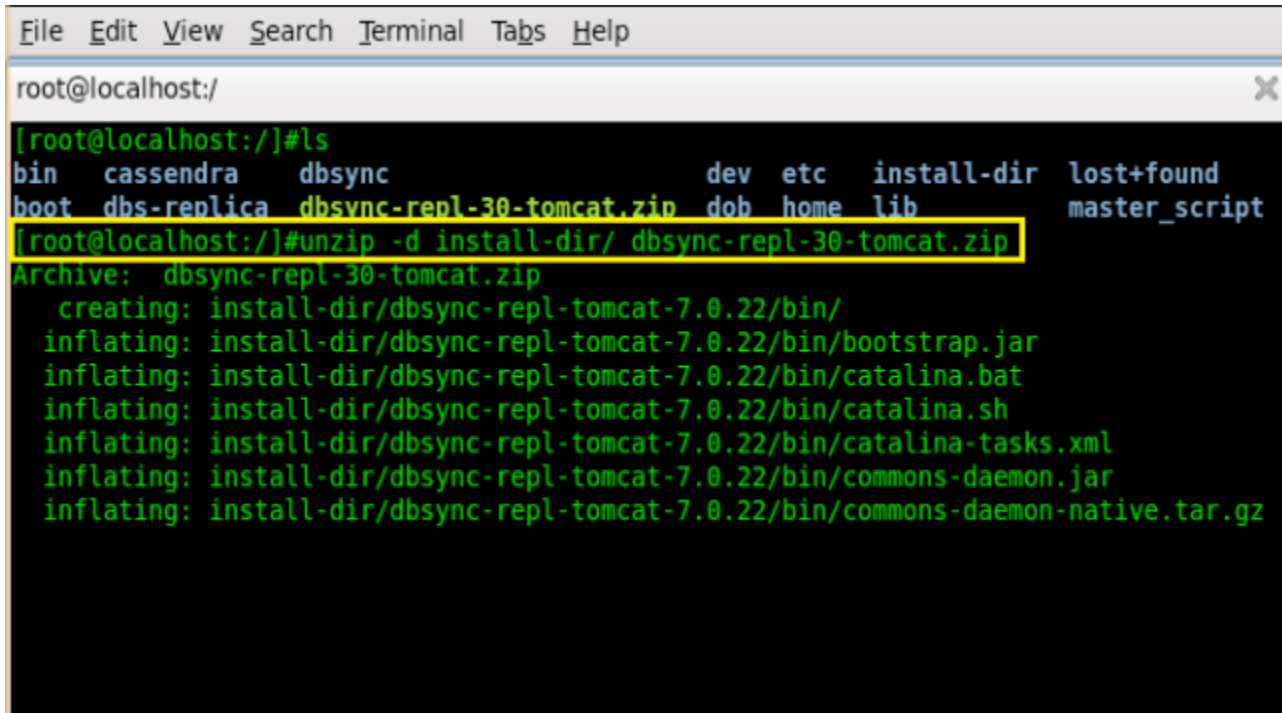

```
File Edit View Search Terminal Tabs Help
root@localhost:/
[root@localhost:~]# ls
bin  cassandra  dbsync  dev  etc  install-dir  lost+found
boot  dbs-replica  dbsync-repl-30-tomcat.zip  dob  home  lib  master_script
[root@localhost:~]# unzip -d install-dir/ dbsync-repl-30-tomcat.zip
Archive:  dbsync-repl-30-tomcat.zip
  creating: install-dir/dbsync-repl-tomcat-7.0.22/bin/
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/bootstrap.jar
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/catalina.bat
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/catalina.sh
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/catalina-tasks.xml
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/commons-daemon.jar
 inflating: install-dir/dbsync-repl-tomcat-7.0.22/bin/commons-daemon-native.tar.gz
```

- The event manager of the Replication tool can be pointed to a specific directory with the following steps. The below command takes you to the directory path of the event manager of the DBSync Cloud Replication tool.

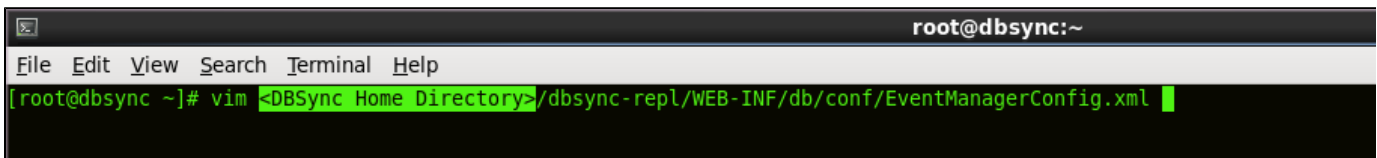

```
File Edit View Search Terminal Help
root@dbsync:~
[root@dbsync ~]# vim <DBSync Home Directory>/dbsync-repl/WEB-INF/db/conf/EventManagerConfig.xml
```

- The directory path of the event manager is shown below.

```
root@dbsync:/install-dir/dbsync-repl-tomcat-7.0.22/dbsync-repl/WEB-INF/db/conf
File Edit View Search Terminal Help
<EventManager>
<!--
  Folder to store persisted events (events that are still within max retry
  count when system is shutdown.
-->
<PersistentFolder>/home/dbsync/temp/event_manager/appl/persist</PersistentFolder>
<!--
  Folder to store error events (events that could not be completed
  successfully by a listener, and exceed the max retry count.)
  This folder must be different from the persistence folder above.
-->
<ErrorEventFolder>/home/dbsync/temp/event_manager/appl/error</ErrorEventFolder>
<!--
  Folder to store successful events.
  This folder must be different from the folder above.
-->
<SuccessEventFolder>/home/dbsync/temp/event_manager/appl/success</SuccessEventFolder>
<!--
  The max number of retries the system will notify a listener before
  the listener can successfully complete the event.
-->
```

- Directory *DBSync* must be replaced by the required directory name to point the event manager to that directory.

```
root@dbsync:/install-dir/dbsync-repl-tomcat-7.0.22/dbsync-repl/WEB-INF/db/conf
File Edit View Search Terminal Help
<EventManager>
<!--
  Folder to store persisted events (events that are still within max retry
  count when system is shutdown.
-->
<PersistentFolder>/home/Directory Name/temp/event_manager/appl/persist</PersistentFolder>
<!--
  Folder to store error events (events that could not be completed
  successfully by a listener, and exceed the max retry count.)
  This folder must be different from the persistence folder above.
-->
<ErrorEventFolder>/home/Directory Name/temp/event_manager/appl/error</ErrorEventFolder>
<!--
  Folder to store successful events.
  This folder must be different from the folder above.
-->
<SuccessEventFolder>/home/Directory Name/temp/event_manager/appl/success</SuccessEventFolder>
<!--
  The max number of retries the system will notify a listener before
  the listener can successfully complete the event.
-->
```

- Change the permission for the scripts by getting into the *bin* folder and provide executive permission for all the shell scripts using the command **Chmod 755 *.sh**.

```

root@localhost:/install-dir/dbsync-repl-tomcat-7.0.22/bin
[root@localhost:dbsync-repl-tomcat-7.0.22]#ls
bin  CVS          DBSync-License.txt  Information.txt  LICENSE  logs  RELEASE-NOTES
conf dbsync.ico  dbsync-repl        lib             log      NOTICE  RUNNING.txt
[root@localhost:dbsync-repl-tomcat-7.0.22]#cd bin/
[root@localhost:bin]#chmod 755 *.sh
[root@localhost:bin]#ls -l
total 2472
-rw-r--r--. 1 root root 28805 Feb 19 10:14 bootstrap.jar
-rw-r--r--. 1 root root 13248 May 7 06:34 catalina.bat
-rwxr-xr-x. 1 root root 19189 Feb 19 10:14 catalina.sh
-rw-r--r--. 1 root root 2168 Feb 19 10:14 catalina-tasks.xml
-rw-r--r--. 1 root root 24239 Feb 19 10:14 commons-daemon.jar
-rw-r--r--. 1 root root 200759 Feb 19 10:14 commons-daemon-native.tar.gz
-rw-r--r--. 1 root root 2131 Feb 19 10:14 configtest.bat
-rwxr-xr-x. 1 root root 1982 Feb 19 10:14 configtest.sh
-rw-r--r--. 1 root root 1342 Feb 19 10:14 cpappend.bat
drwxr-xr-x. 2 root root 4096 May 15 13:37 CVS
-rwxr-xr-x. 1 root root 7492 Feb 19 10:14 daemon.sh
-rw-r--r--. 1 root root 2178 Feb 19 10:14 digest.bat
-rwxr-xr-x. 1 root root 2021 Feb 19 10:14 digest.sh
-rw-r--r--. 1 root root 18 Nov 24 2009 run.bat
-rw-r--r--. 1 root root 6380 Feb 19 22:46 service.bat
-rw-r--r--. 1 root root 3264 Feb 19 10:14 setclasspath.bat
-rwxr-xr-x. 1 root root 3524 Feb 19 10:14 setclasspath.sh
-rw-r--r--. 1 root root 2111 Feb 19 10:14 shutdown.bat
-rwxr-xr-x. 1 root root 1960 Feb 19 10:14 shutdown.sh
-rw-r--r--. 1 root root 2112 Feb 19 10:14 startup.bat
-rwxr-xr-x. 1 root root 1961 Feb 19 10:14 startup.sh
-rw-r--r--. 1 root root 1588736 Feb 19 10:14 tcnative-1.dll
-rw-r--r--. 1 root root 103936 Feb 19 10:14 tomcat7.exe
-rw-r--r--. 1 root root 104448 Feb 19 10:14 tomcat7w.exe
-rw-r--r--. 1 root root 38161 Feb 19 10:14 tomcat-juli.jar
-rw-r--r--. 1 root root 288166 Feb 19 10:14 tomcat-native.tar.gz
-rw-r--r--. 1 root root 4114 Feb 19 10:14 tool-wrapper.bat
-rwxr-xr-x. 1 root root 5086 Feb 19 10:14 tool-wrapper.sh
-rw-r--r--. 1 root root 2116 Feb 19 10:14 version.bat
-rwxr-xr-x. 1 root root 1965 Feb 19 10:14 version.sh

```

- At this point, the DBSync Cloud Replication tool is installed on your Linux server. You can start the DBSync Cloud Replication tool by navigating to the **bin** folder and running the command from the terminal window **./catalina.sh start**.

```

root@localhost:/install-dir/dbsync-repl-tomcat-7.0.22/bin
[root@localhost:bin]#ls
bootstrap.jar      commons-daemon.jar      cpappend.bat      digest.sh
catalina.bat      commons-daemon-native.tar.gz  CVS              run.bat
catalina.sh       configtest.bat         daemon.sh         service.bat
catalina-tasks.xml configtest.sh          digest.bat       setclasspath.bat
[root@localhost:bin]#./catalina.sh start
Using CATALINA_BASE:   /install-dir/dbsync-repl-tomcat-7.0.22
Using CATALINA_HOME:   /install-dir/dbsync-repl-tomcat-7.0.22
Using CATALINA_TMPDIR: /install-dir/dbsync-repl-tomcat-7.0.22/temp
Using JRE_HOME:        /usr/java/jdk1.7.0_07
Using CLASSPATH:       /install-dir/dbsync-repl-tomcat-7.0.22/bin/bootstrap.jar:
[root@localhost:bin]#ps -ef | grep java
root      3334      1 60 09:55 pts/0    00:00:15 /usr/java/jdk1.7.0_07/bin/java -l
erties -Djava.util.logging.manager=org.apache.juli.ClassLoaderLogManager -Djava.c
bsync-repl-tomcat-7.0.22/bin/bootstrap.jar:/install-dir/dbsync-repl-tomcat-7.0.22
.home=/install-dir/dbsync-repl-tomcat-7.0.22 -Djava.io.tmpdir=/install-dir/dbsync
root      3366  2594  1 09:56 pts/0    00:00:00 grep java
[root@localhost:bin]#clear

```


- To check the logs you can run the command **tail -f logs/catalina.out** as illustrated in the below screenshot

```

root@localhost:/install-dir/dbsync-repl-tomcat-7.0.22
[root@localhost:dbsync-repl-tomcat-7.0.22]#ls
bin  CVS  DBSync-License.txt  Information.txt  LICENSE  logs  RELEASE-NOTES
conf  dbsync.ico  dbsync-repl  lib  log  NOTICE  RUNNING.txt
[root@localhost:dbsync-repl-tomcat-7.0.22]#tail -f logs/catalina.out
Jul 09, 2013 10:02:30 AM org.apache.catalina.startup.Catalina start
INFO: Server startup in 15236 ms
Jul 09, 2013 10:03:27 AM com.dbsync.framework.event.cubbyhole.CubbyHoleEventManager$E
INFO: Event manager is retrying events...
Jul 09, 2013 10:04:27 AM com.dbsync.framework.event.cubbyhole.CubbyHoleEventManager$E
INFO: Event manager is retrying events...
Jul 09, 2013 10:05:27 AM com.dbsync.framework.event.cubbyhole.CubbyHoleEventManager$E
INFO: Event manager is retrying events...
Jul 09, 2013 10:06:27 AM com.dbsync.framework.event.cubbyhole.CubbyHoleEventManager$E
INFO: Event manager is retrying events...

```

- To access the DBSync Cloud Replication console, please paste the <http://localhost:8080/dbsync> URL in your browser address bar and you will be presented with the DBSync Cloud Replication Home page.

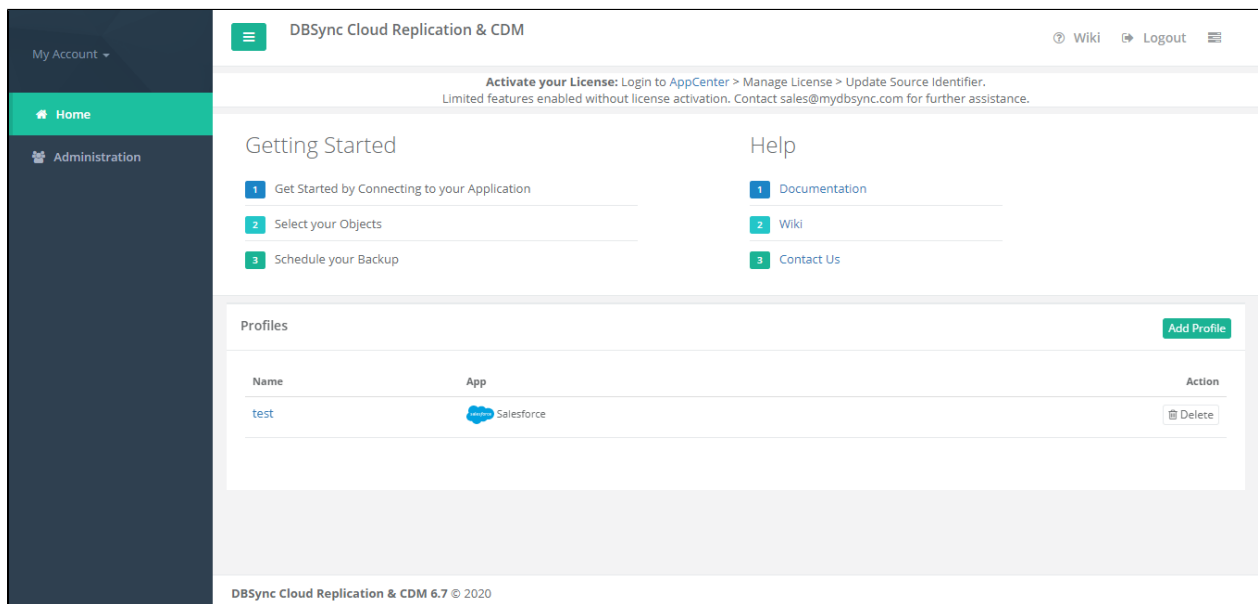

- To stop DBSync Cloud Replication, navigate to the **bin** folder and execute the script **./catalina.sh stop** from the terminal window and to check the status of process execute the command **ps -ef | grep java** as shown below.

```
[root@localhost:bin]# ./catalina.sh stop
Using CATALINA_BASE:   /install-dir/dbsync-repl-tomcat-7.0.22
Using CATALINA_HOME:   /install-dir/dbsync-repl-tomcat-7.0.22
Using CATALINA_TMPDIR: /install-dir/dbsync-repl-tomcat-7.0.22/temp
Using JRE_HOME:        /usr/java/jdk1.7.0_07
Using CLASSPATH:        /install-dir/dbsync-repl-tomcat-7.0.22/bin/b
[root@localhost:bin]# ps -ef | grep java
root      3402  2594  0 09:57 pts/0    00:00:00 grep java
[root@localhost:bin]#
```